



www.fanucworld.com

## 6066/6089/6090 Jumper Warning

*Must have either jumpers or wires to work. The silver jumpers were painted red for illustration purposes only*

**Old drive** will have either **jumpers** from 2-13, 3-14, 15-16, and 17-18 that must be transferred to the new drive, **or** the **old drive** will have **wires** on 13, 14, 15, 16, 17, and 19 that must be connected to the new drive.



Disclaimer:

TIE assumes no liability whatsoever for any damages incurred by you or third parties resulting from errors in or omissions from the information included herein.

Updated 6/28/2018




www.fanucworld.com

## For A06B-6089-H106, A06B-6066-H008, and A06B-6090-H008

**Old drive** will have either **jumper**s from 3-13, 4-14, 15-16, and 17-18 that must be transferred to the new drive, **or** the **old drive** will have **wires** on 13, 14, 15, 16, 17, and 19 that must be connected to the new drive.



**6089 and 6090: Must also set the switches**

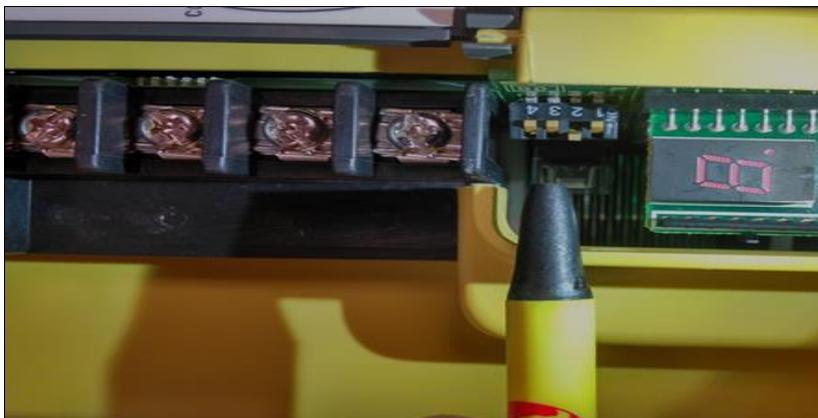

*Disclaimer:*

*TIE assumes no liability whatsoever for any damages incurred by you or third parties resulting from errors in or omissions from the information included herein.*

Updated 6/28/2018